


X-SUPPORT SXS

ORDER NUMBER: 0050.1210

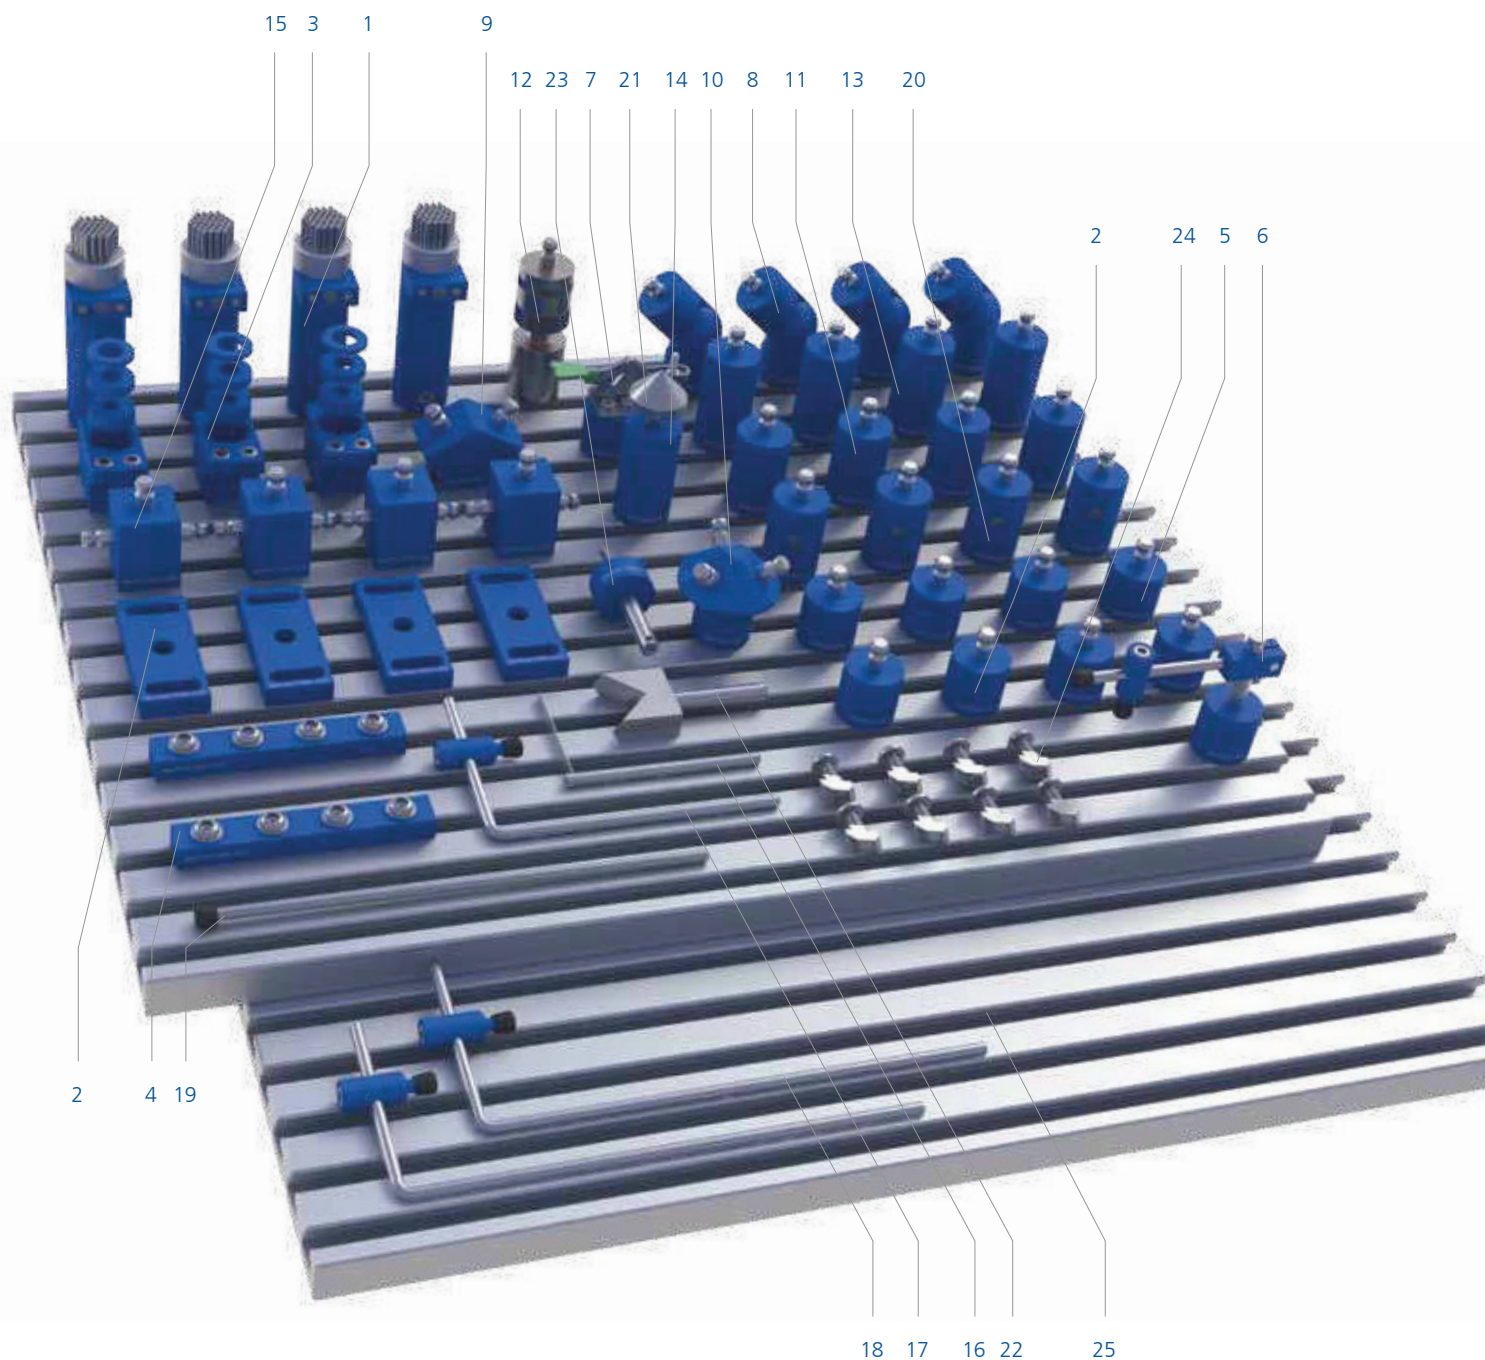

X-SUPPORT SXS

If the interfering contour needs to be kept particularly small, the X-Support SXS is the ideal choice. Despite its small footprint, complex work pieces can be held securely. – Impressive diversity!

The modular system consists of the following individual components:

Fig.	Article no.	Quantity	Description	Dimension	Pin field	Number of pins	Pin diameter	Pin stroke
1	0050.1237	4	X-SUPPORT SXS Module	ø 26 mm	–	37 Pieces	2.5 mm	12 mm
2	0050.1227	4	Connector and base plate	ø 26 x 35 mm	–	–	–	–
3	0900.0501	1 Set = 3 Pieces	Gripper pads	–	–	–	–	–
4	0900.2500	1 Set = 2 Pieces	Connector	–	–	–	–	–
5	0050.1225	4	Adapter	ø 26 x 25 mm	–	–	–	–
6	0050.1216	1	Pressure pad	ø 26 mm	–	–	–	–
7	0050.1229	1	Horizontal clamp	–	–	–	–	–
8	0050.1230	4	Angle, infinitely variable	ø 26 mm	–	–	–	–
9	0050.1232	1	Double angle	30°	–	–	–	–
10	0050.1233	1	Triple angle	30°	–	–	–	–
11	0050.1240	4	Adapter	ø 26 x 40 mm	–	–	–	–
12	0050.1243	1	Stepless height-adjustable module (15 mm)	ø 26 mm	–	–	–	–
13	0050.1250	4	Adapter	ø 26 x 50 mm	–	–	–	–
14	0050.1251	1	Components for use	ø 26 x 50 mm	–	–	–	–
15	0050.1252	4	Joint	90°	–	–	–	–
16	0050.1425	1	Pressure pad	–	–	–	–	–
17	0050.3115	1	Pressure pad	120 mm	–	–	–	–
18	0050.3116	2	Pressure pad	200 mm	–	–	–	–
19	0050.3117	1	Stop	–	–	–	–	–
20	0050.1241	4	Component for pressure pad	ø 26 x 40 mm	–	–	–	–
21	0900.4001	1	Cone support	90°	–	–	–	–
22	0900.4002	1	Prism support	90°	–	–	–	–
23	0900.4003	1	Single pin insert	–	–	–	5 mm	19 mm
24	0900.2501	1 Set = 8 Pieces	Set of fastening parts	–	–	–	–	–
25	0900.0500	2	T-slot profile plate	375 x 500 x 20 mm Slot width: 8 mm	–	–	–	–
–	0900.3620	2	Bow-type handles	–	–	–	–	–
–	0900.0000	1	Screwdriver	–	–	–	–	–
26	0900.9000	1	MATRIX case	–	–	–	–	–



26

MATRIX case

Delivery of the systems in MATRIX case (ORDER NUMBER: 0900.9000).
Fig. 26